
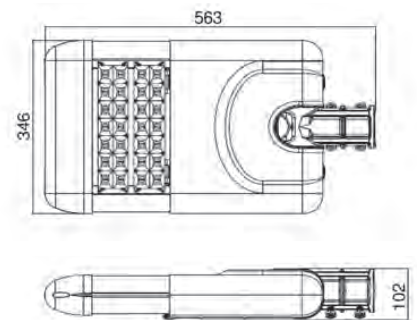


street light

LED

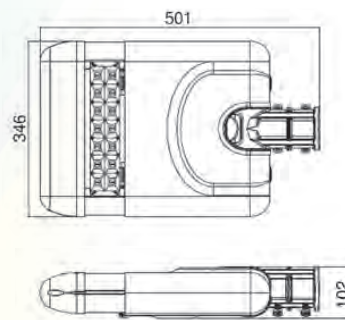

ST 30 L1-L5WW/NW/CW
 ST 60 L1-L5WW/NW/CW

TECHNICAL SPECIFICATION

MODEL	ST 30 L* WW/NW/CW	ST 60 L* WW/NW/CW
Light source	Cree	Cree
Wattage	30 W	60 W
Luminous flux	2 760/2 850/3 200 lm	5 520/5 700/6 500 lm
Luminous efficiency	92/95/106 lm/W	92/95/108 lm/W
Substitution	WW/NW/CW	WW/NW/CW
Saving	>70 Ra	>70 Ra
Rated lamp life time	100 000 h	100 000 h
Voltage	120 - 277 V AC	120 - 277 V AC
Certification	CE, RoHS	CE, RoHS
IP rating	IP 66	IP 66
Recommended operating temperature	-40°C ~+50°C	-40°C ~+50°C
Dimension	501x346x102 mm	563x346x102 mm

*Beans angle L1 (143° * 95°)

*Beans angle L2 (150° * 75°)


*Beans angle L3 (155°*100°)

*Beans angle L4 (155° * 50°)


*Beans angle L5 (140° * 60°)

ST 30 L1-L5WW/NW/CW


ST 30 L1 WW/NW/CW

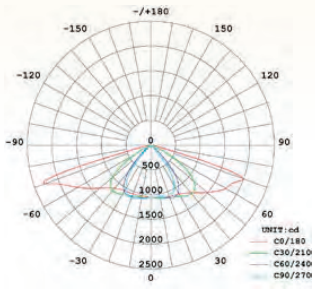


ST 30 L2 WW/NW/CW

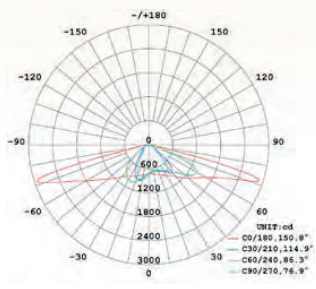


ST 30 L3 WW/NW/CW

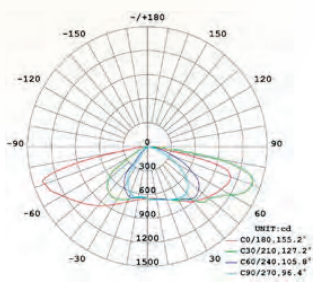

ST 30 L4 WW/NW/CW

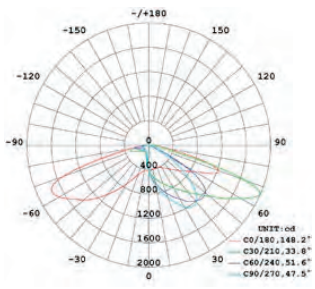


ST 30 L5 WW/NW/CW

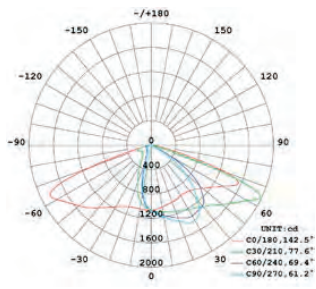


ST 60 L1-L5WW/NW/CW


ST 60 L1 WW/NW/CW

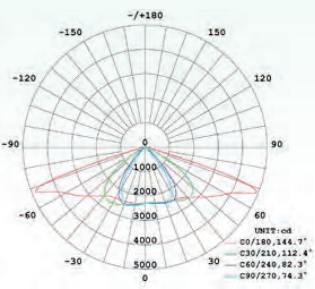


ST 60 L2 WW/NW/CW

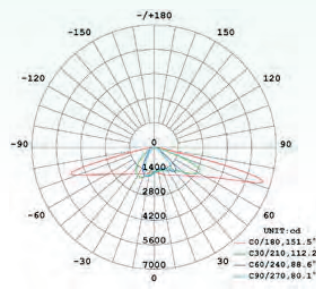


ST 60 L3 WW/NW/CW

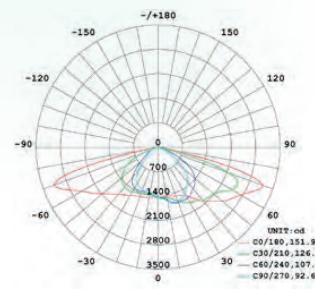

ST 60 L4 WW/NW/CW

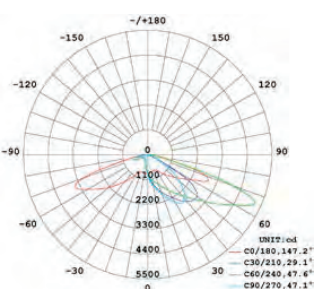

ST 60 L5 WW/NW/CW

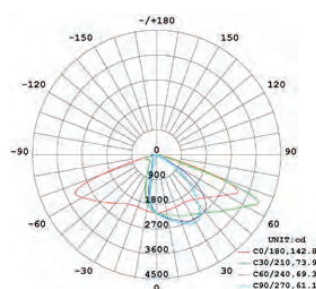

LED