
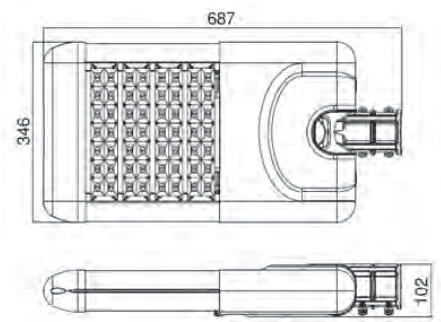
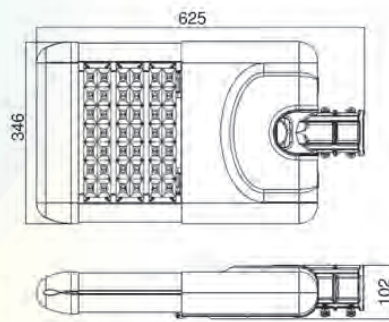


street light

LED

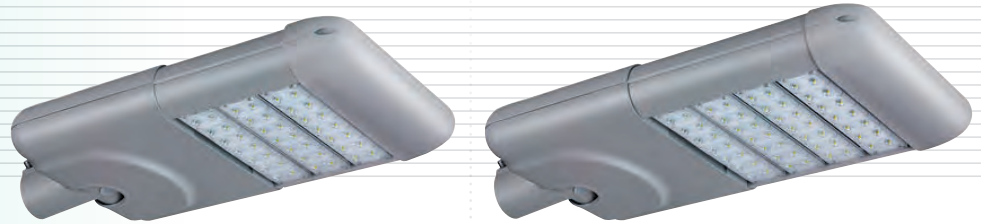

ST 90 L1-L5WW/NW/CW ST 120 L1-L5WW/NW/CW

TECHNICAL SPECIFICATION

MODEL	ST 90 L* WW/NW/CW	ST 120 L* WW/NW/CW
Light source	Cree	Cree
Wattage	90 W	120 W
Luminous flux	8 538/9 000/9 900 lm	11 400/12 600/13 400 lm
Luminous efficiency	92/100/110 lm/W	95/105/112 lm/W
Light color	WW/NW/CW	WW/NW/CW
Color rendering index	>70 Ra	>70 Ra
Rated lamp life time	50 000 h	50 000 h
Voltage	120 - 277 V AC	120 - 277 V AC
Certification	CE, RoHS	CE, RoHS
IP rating	IP 66	IP 66
Recommended operating temperature	-40°C ~+50°C	-40°C ~+50°C
Dimensions	625x346x102 mm	687x346x102 mm

*Bean angle L1 (143° * 95°)

*Bean angle L2 (150° * 75°)


*Bean angle L3 (155°*100°)

*Bean angle L4 (155° * 50°)


*Bean angle L5 (140° * 60°)

ST 90 L1-L5WW/NW/CW


ST 90 L1 WW/NW/CW

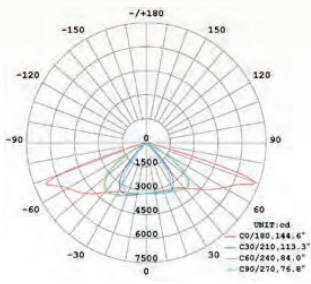


ST 90 L2 WW/NW/CW

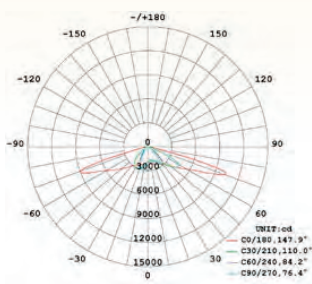


ST 90 L3 WW/NW/CW

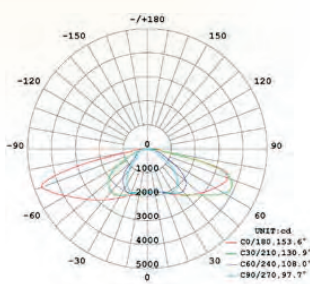

ST 90 L4 WW/NW/CW

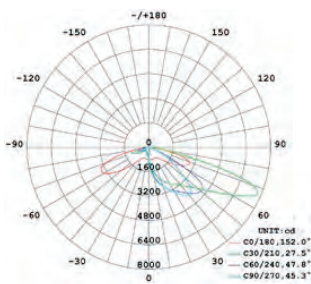


ST 90 L5 WW/NW/CW

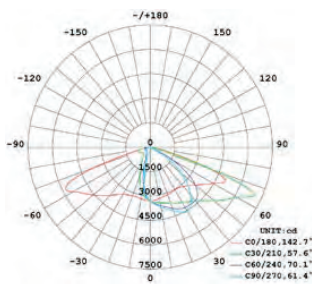


ST 120 L1-L5WW/NW/CW


ST 120 L1 WW/NW/CW

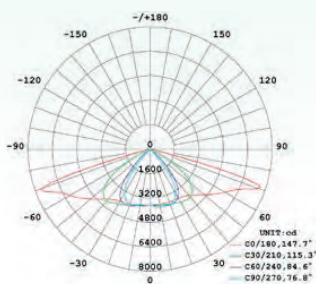


ST 120 L2 WW/NW/CW

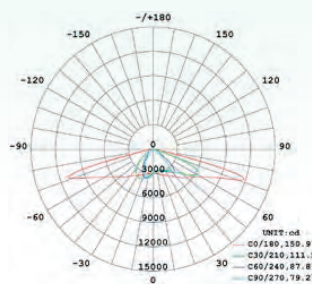

ST 120 L3 WW/NW/CW

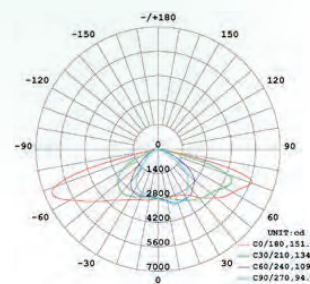

ST 120 L4 WW/NW/CW

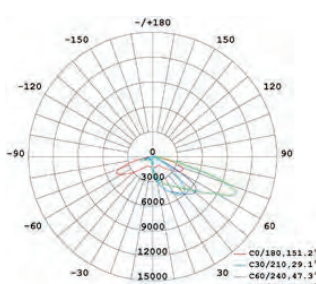

ST 120 L5 WW/NW/CW

